


ASSEMBLY INSTRUCTIONS FOR YOUR RUBIX FLUSH MOUNT

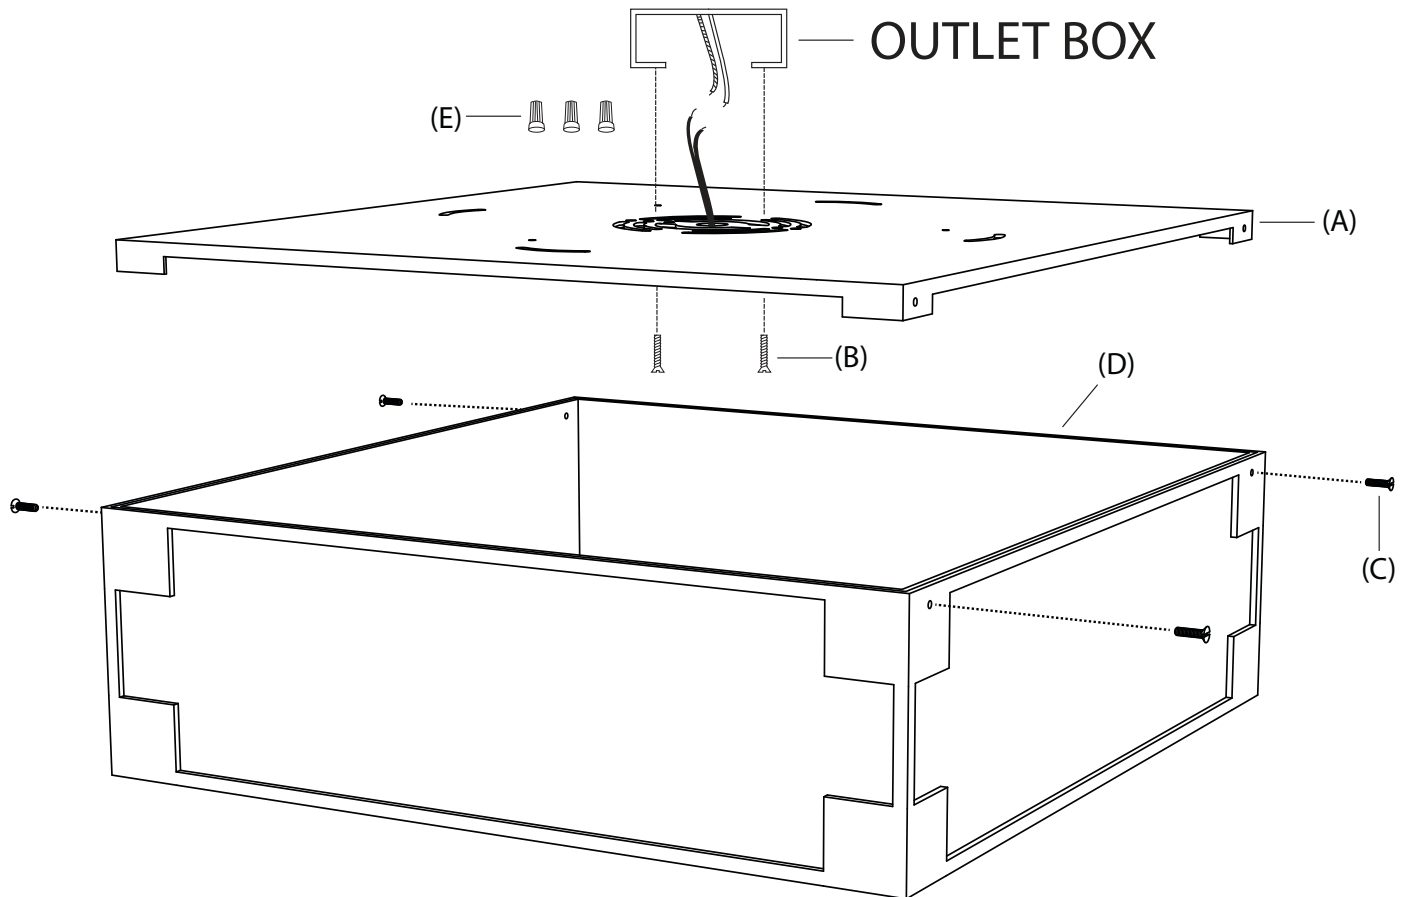

IMPORTANT SAFETY INSTRUCTIONS:

- * These instructions are provided for your safety.
- * It is very important that they are read completely before beginning the installation of your fixture.
- * WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
- * Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- * This fixture is UL rated for damp locations.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton and discard packing materials.
3. Place parts on a level surface. Remove mounting plate (A) from shade (D) by unthreading screws (C). Set screws (C) aside.
4. Lift mounting plate (A) to the ceiling and make the proper electrical connections noted in steps 5 - 7. **A licensed electrician is recommended.**
5. Attach ground wire from fixture (green or copper in color) to ground wire from outlet box. Fasten wires together with wire nut (E) and tightly wrap connection with electrical tape.
6. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (E) and tightly wrap connection with electrical tape.
7. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (E) and tightly wrap connection with electrical tape. Gently push wire connections back into the outlet box.
8. Affix mounting plate (A) to ceiling outlet box using mounting screws (B).
9. Place shade (D) over mounting plate (A). Use screws (C) to attach the shade to the canopy.
10. Reconnect main electrical supply at the fuse box/ circuit breaker and test the fixture.

Note: This lamp comes with a non-replaceable LED panel.

**** To clean, use soft cloth only. Do not use any chemical or abrasive cleaners. ****