


ASSEMBLY INSTRUCTIONS FOR YOUR ANDROMEDA FLUSHMOUNT / SCONCE

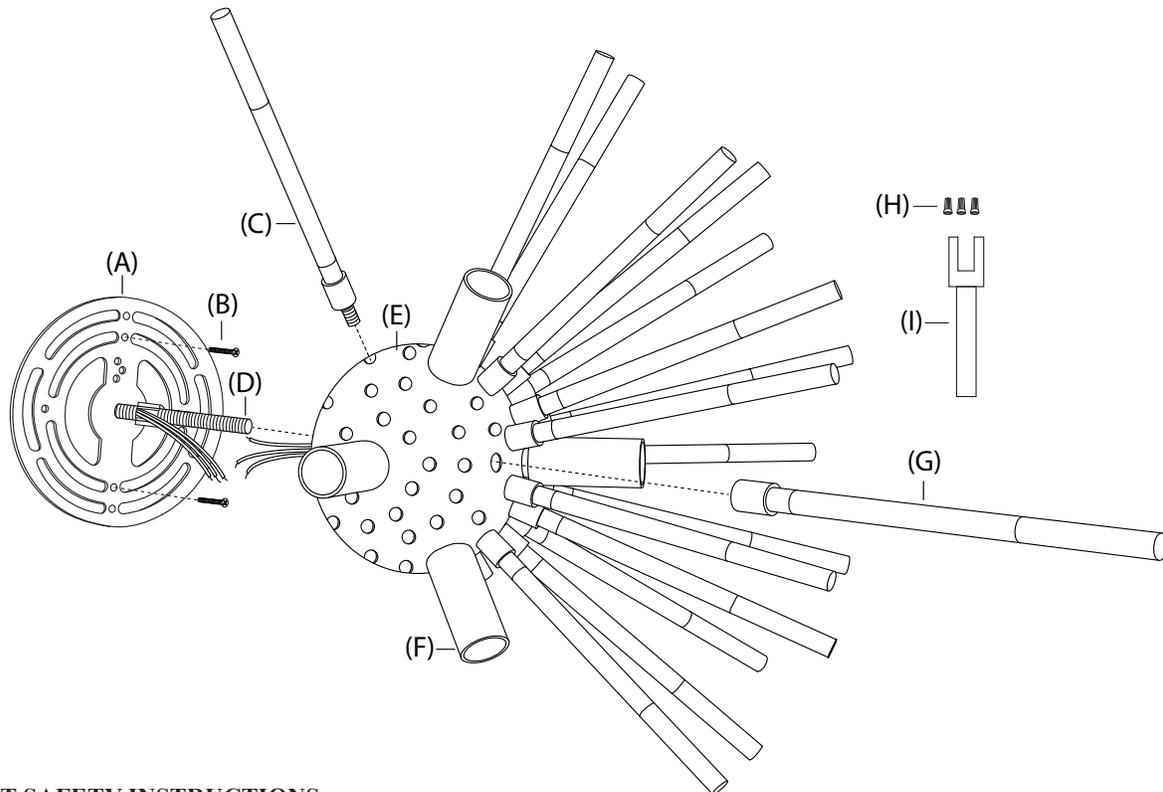

IMPORTANT SAFETY INSTRUCTIONS:

- * These instructions are provided for your safety.
- * It is very important that they are read completely before beginning the installation of your fixture.
- * **WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**
- * Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- * This fixture is UL rated for dry locations.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton and discard packing materials. Place the parts on a level surface.
3. Remove mounting plate (A) from housing (E) by unthreading finial (G). Set finial aside.
4. Carefully pull wires from the outlet box and thread them through the center of mounting plate (A) and exiting through the opening in threaded tube (D) (as shown).
5. Affix mounting plate (A) to outlet box with mounting screws (B) provided.
6. Lift the fixture to the mounting plate and make the proper electrical connections noted in steps 7-9. **LICENSED ELECTRICIAN IS RECOMMENDED.**
7. Attach ground wire from fixture (green or copper in color) to ground wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape.
8. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape.
9. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape. Gently push wire connections back into the wall outlet box.
10. Place housing (E) over mounting plate (A). Thread finial (G) onto tube (D) to secure the housing to the mounting surface. Use wrench (I) to tighten finial. Note: cover wrench prongs with a soft, clean rag to avoid scratching metal on fixture.
11. Thread rods (C) into housing until hand tight. Note: do not over tighten as this could cause damage to rods. Note: Grasp acrylic rods at base, near threads to avoid damage to acrylic and cap. Do not force rods into housing. If you experience difficulty threading a rod into the housing at chosen spot, don't try to force the parts to thread together. Instead, try threading the rod into a different opening in the housing.
12. Install four 40W max., type G16.5, candelabra base bulb into the sockets (F).
13. Reconnect main electrical supply at the fuse box/ circuit breaker and test the fixture.

**** To clean, use soft cloth only. Do not use any chemical or abrasive cleaners. ****