


ASSEMBLY INSTRUCTIONS FOR YOUR

# BUSTER PENDANT

**\*\*IT IS RECOMMENDED THAT A CERTIFIED  
LICENSED ELECTRICIAN INSTALL THIS FIXTURE\*\***

**ASSEMBLY INSTRUCTIONS:**

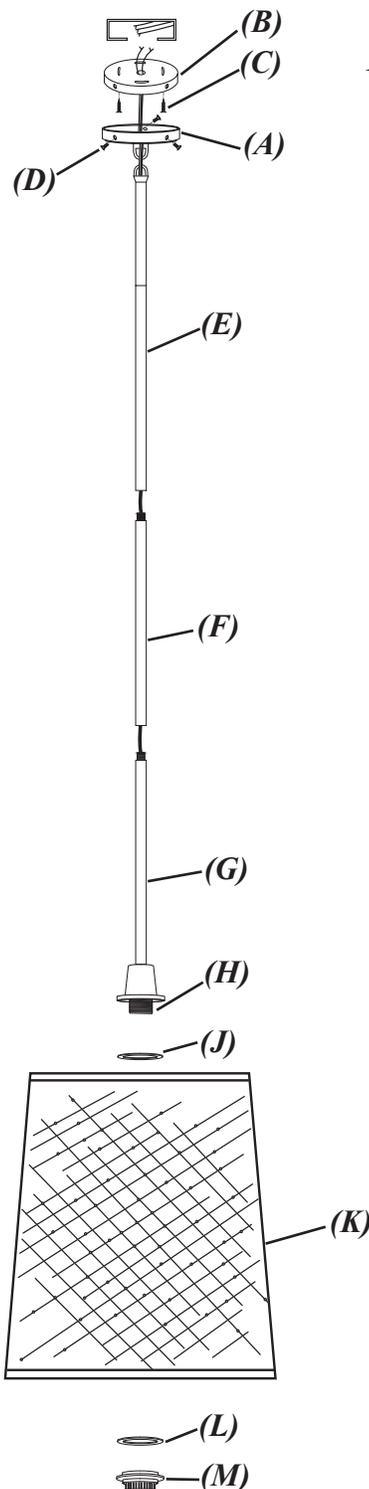

**1) SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE  
MAIN FUSE BOX/CIRCUIT BREAKER.**

**2) Thread top nipple of pole (F) to bottom of pole (E).**

**3) Thread top nipple of pole (G) to bottom of pole (F).**

**4) Connect the hot wires from the fixture (ROUND) to the hot junction box wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector provided and wrap connection with electrical tape.**

**5) Repeat this procedure for the RIBBED neutral wires from the light fixture to the wire from the outlet box (usually WHITE).**

**6) Connect the ground wire from the light fixture (bare copper) to the ground wire from the outlet box.**

**7) Attach the mounting plate (B) to the outlet box and tighten it with screws provided (C).**

**8) Replace the canopy (A) to the mounting plate (B), tighten it with base screws (D).**

**9) Remove flange (M) from socket (H).**

**10) Put plastic washer (J) onto socket (H), letting socket (H) pass through the hole of plastic washer (J).**

**11) Put glass shade (K) onto top of socket (H), and attach plastic washer (L) to socket which protrudes into glass shade (K).**

**12) Tighten the shade by screwing flange (M) onto the thread of socket (H).**

**13) Insert light bulb Type A, maximum 200 watt into socket.**