


ASSEMBLY INSTRUCTIONS FOR YOUR MARTIN DOUBLE COLUMN TRAY FLOOR LAMP

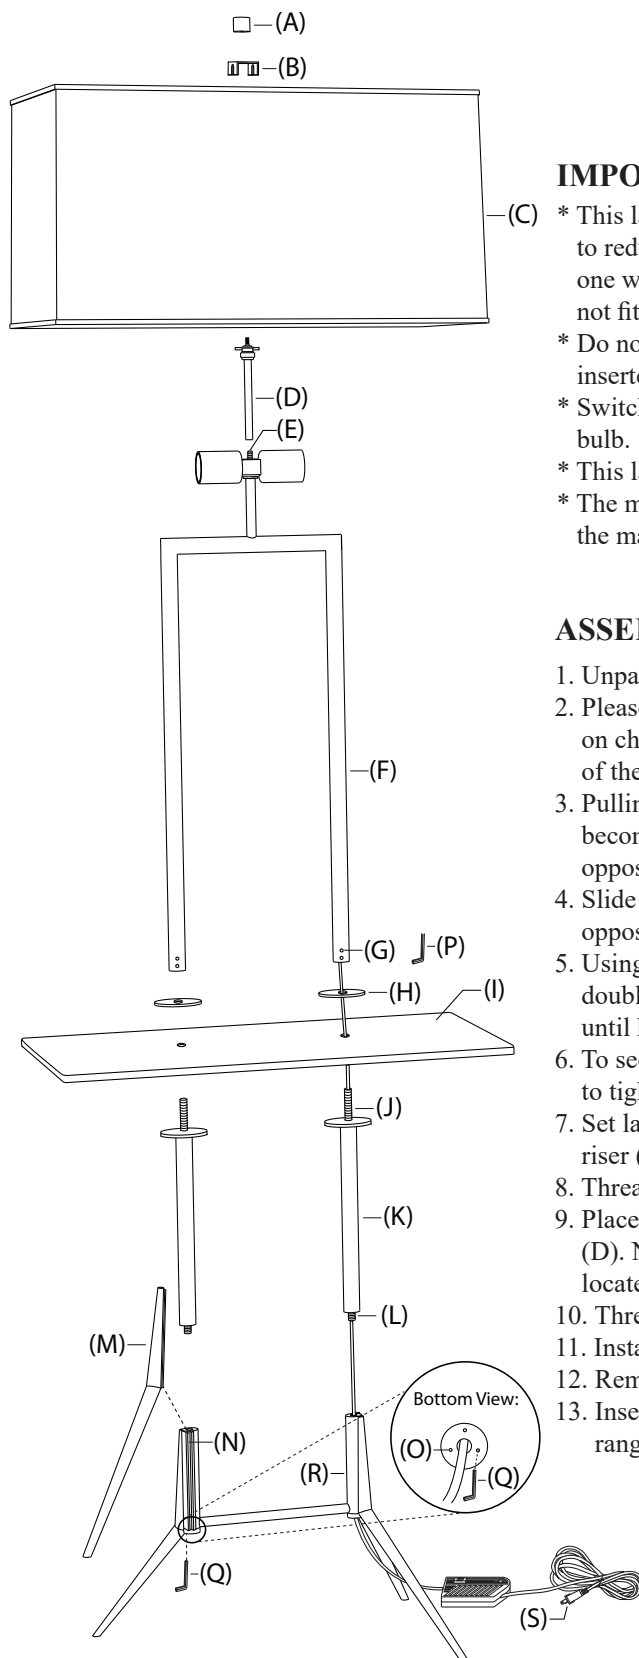

IMPORTANT SAFETY INSTRUCTIONS:

- * This lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If it does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do NOT alter the plug.
- * Do not use with an extension cord unless the plug from the lamp can be fully inserted into the extension cord receptacle.
- * Switch power off and remove plug from the wall outlet before replacing the bulb.
- * This lamp is UL rated for dry locations.
- * The marble tray is designed for up to 10 lbs. on a single side. Do not exceed the maximum weight limit on any one side.

ASSEMBLY INSTRUCTIONS:

1. Unpack all parts and remove packing materials. Place parts on a level surface.
2. Please note: legs (M) are labeled with stickers that correspond with stickers on channels (N). Slide the leg labeled with sticker number one (1) into the top of the channel labeled with matching sticker. Repeat with the remaining legs.
3. Pulling cord taut from below the assembled legs (R) so wiring does not become damaged, thread column (K) onto assembled legs (R). Repeat step on opposite side.
4. Slide marble (I) and washer (H) onto threaded tube (J). Repeat step on opposite side.
5. Using wrench (P), back screws (G) out of holes in double column (F). Slide double column (F) onto threaded tubes (J). Use wrench (P) to tighten screws until hand tight, securing column (F) in place.
6. To secure legs in place, carefully turn lamp over on its side. Use wrench (Q) to tighten set screws (O). Rotate wrench until hand tight.
7. Set lamp upright and remove finial (A) and shade bracket (B) from shade riser (D).
8. Thread shade riser (D) onto socket housing (E).
9. Place shade (C) onto shade riser (D). Place shade lock (B) onto shade riser (D). Note: shade lock (B) should be turned so cutouts fit over alignment arms located at the top of shade riser (D).
10. Thread finial (A) onto shade riser (D) to secure the shade to the lamp.
11. Install two 100W max., type A, medium base bulbs into the socket.
12. Remove protective plastic from plug (S).
13. Insert plug (S) into wall outlet. Control power to lamp by operating full range dimmer on cord.