

ASSEMBLY INSTRUCTIONS FOR YOUR

Jonathan Adler

VENTANA

3-TIER CHANDELIER

IMPORTANT SAFETY INSTRUCTIONS:

*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


*DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

WARNING:

*Turn the power to fixture off before replacing bulbs, making sure the bulbs have had sufficient time to cool down. Do not subject the fixture to any shock while lit as shattering of bulbs may result.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Remove cross bar (A) from threaded nipple (D), and canopy (C). Affix cross bar (A) to "J BOX" using screws (B) provided.
4. Remove quick connector (E) from loop on threaded nipple (D) and loop on top extension (F).
5. Measure desired drop for fixture to hang and add / remove extension tubes (F). Guide wiring through extension tubes before threading tubes together.
- **ADD / REMOVE EXTENSIONS: (Un)Thread the threaded nipple of one extension into the threaded opening of the next extension. Make sure wiring is pulled tight when threading extensions together to prevent damage to the wire**
6. Thread wiring through threaded nipple (D).
7. Thread wiring through canopy (C).
8. Lift fixture to "J BOX", and thread wiring through hole in crossbar (A) Make proper electrical connection. A LICENSED ELECTRICIAN IS RECOMMENDED.
9. Connect the ground wire (green or copper) from the fixture to the ground wire in the outlet box. Connect the black wire of the fixture (or smooth side of the wire) to the black wire in outlet box using wire nut (I). Tightly wrap connection with electrical tape. Connect the white wire of the fixture (or rough side of the wire) to the white wire in outlet box using wire nut (I). Tightly wrap connection with electrical tape.
10. Hold canopy against ceiling over "J BOX". Slide threaded nipple (D) through canopy (C) and thread into hole in center of crossbar (A). Turn until collar on threaded nipple (D) holds canopy securely against ceiling.
11. Attach quick connector (E) to loop on threaded nipple (D) and loop on top extension (F).
12. Install twelve (12) B9.5 Candelabra 25W max bulbs into sockets (H).
13. To attach shades (G) to fixture, open shade clip (located inside shade (G)) and slide clip over bulb until clip reaches a resting position. (DO NOT ATTACH SHADES UNLESS POWER TO FIXTURE IS OFF.)

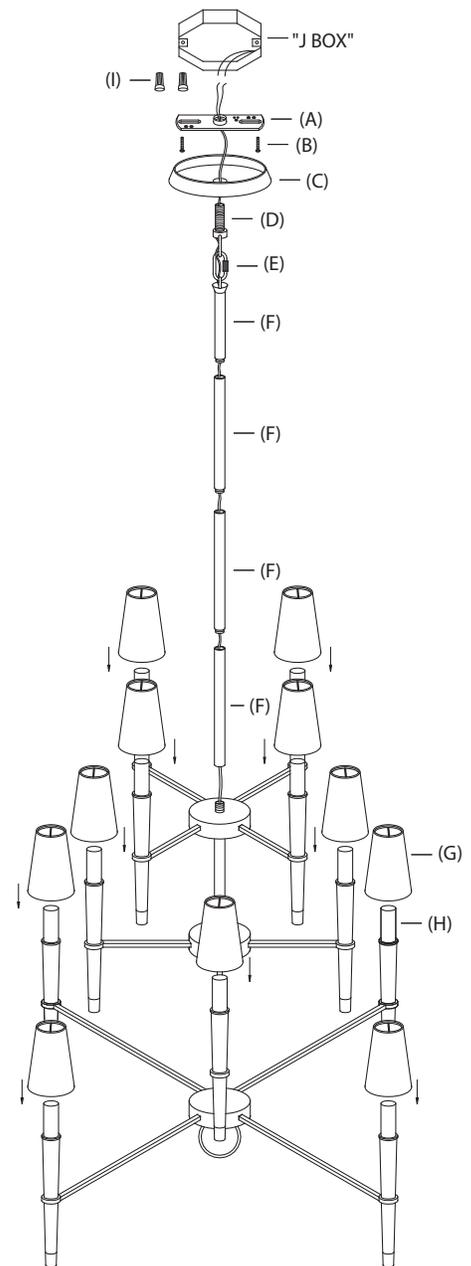

CARE INSTRUCTIONS:

*To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.