


ASSEMBLY INSTRUCTIONS FOR YOUR BLING PENDANT

IMPORTANT SAFETY INSTRUCTIONS:

- *These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture. We **STRONGLY** recommend installation be completed by a licensed electrician.
- *Do not connect the electricity to the fixture until it has been completely assembled. Turn the power to fixture off before replacing bulbs.
- *Review all instruction pages before installing the fixture.

ASSEMBLY INSTRUCTIONS

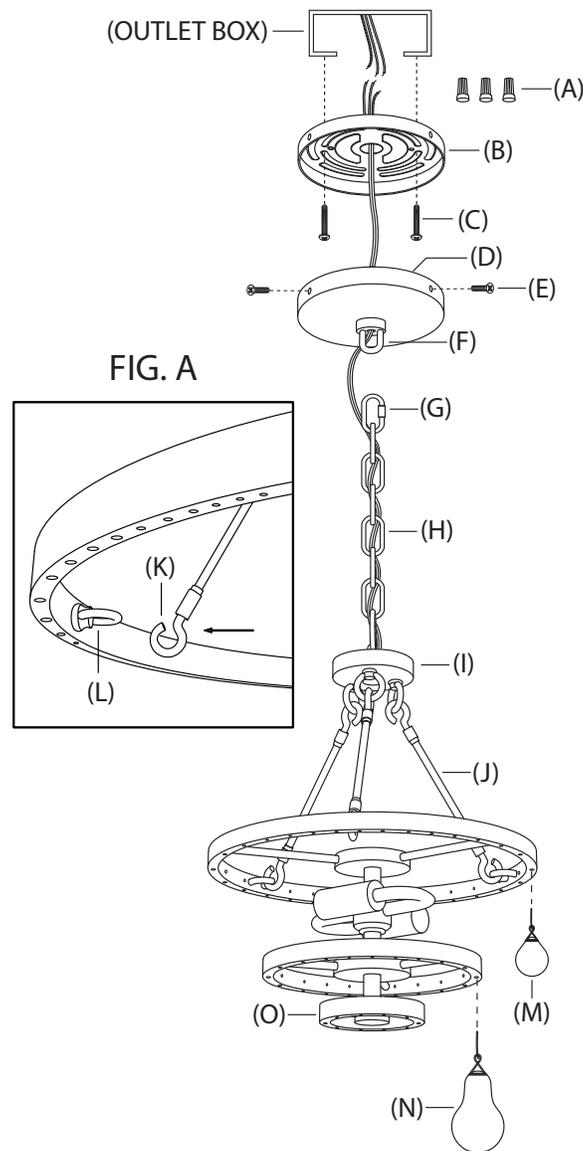





1. SHUT OFF THE ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from the carton and discard packing material.
3. Remove mounting plate (B) from canopy (D) by removing screws (E).
4. Carefully pull wiring from outlet box. Thread wires through center hole in mounting plate (B). Attach mounting plate (B) to outlet box using screws (C), provided.
5. Measure desired drop for fixture to hang from outlet box. Using chain pliers (not included), remove links from chain (H) to achieve drop.
6. Connect hang straight (F) to chain (H) using quick link (G).
7. Guide the wires exiting the top of housing (I) through chain links (H). Continue to guide wiring through center hole in canopy (D).
8. Connect hooks (K), at the end of arms (J), to loops (L) attached to the top ring of the fixture. See FIG. A for illustration.
9. Lift fixture to ceiling outlet box and make proper electrical connections described in steps 10 - 12. **A licensed electrician is recommended.**
10. Attach ground wire from fixture (green or silver in color) to ground wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
11. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
12. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Carefully push wire connections back into ceiling outlet box. Slide canopy (D) over mounting plate (B). Thread screws (E) into vacant holes in canopy (D) to secure fixture to ceiling.
14. Install 2 - 60W max. Type G, candelabra base bulbs into the sockets.

GLASS DROP INSTALLATION:

1. Remove packaging from glass drops. NOTE: The fixture is designed to have alternating sizes of glass drops (M) and (N) on each ring. It is recommended that you install the glass drops on the bottom ring first and continue working up towards the top ring.
2. From below metal band (O), place the wire on glass drop (N) through one of the holes in the bottom of metal band (O). Insert the wire at an angle so it exits the hole on the inside of the metal band (O) as shown in FIG.B.
3. Take the exposed portion of the wire and bend it down to secure the placement of the glass drop as shown in FIG. C.
4. Repeat steps 2 and 3 to install glass drop (M).
5. Repeat steps 2 - 4 for each ring until glass drops (M & N) are completely installed.

CARE INSTRUCTIONS:

- *To clean, wipe a soft cloth. DO NOT use any chemical or abrasive cleaners.
- *White gloves have been shipped with each fixture. Please wear gloves to keep the fixture clean during installation.

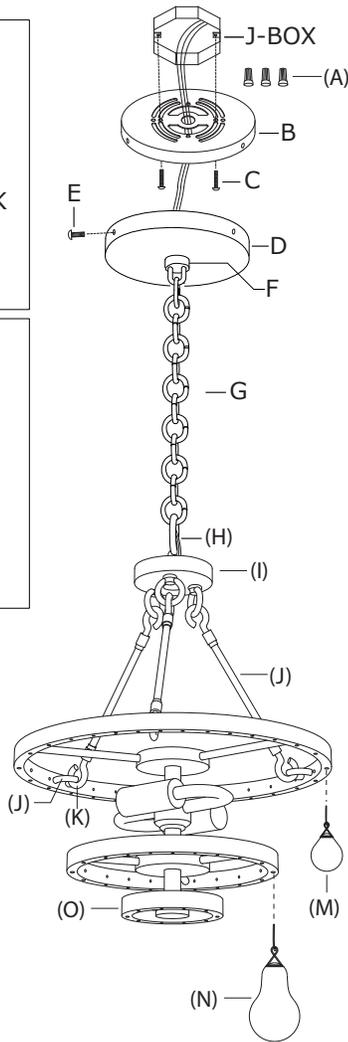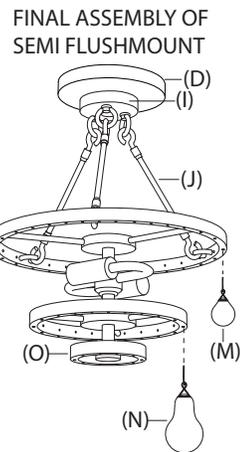


SEMI FLUSHMOUNT ASSEMBLY INSTRUCTIONS

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Remove screws (E) from canopy (D). Remove mounting plate (B) from canopy (D).
4. Guide wires from "J BOX" through center hole in mounting plate (B).
5. Affix mounting plate (B) to "J BOX" using screws (C) provided.
6. Remove quick links located at each end of the chain (G) by unthreading the cylinder on the quick link to an open position. Remove chain (G) from fixture.
7. Unthread loop (H) from housing (I) to expose threaded tube (P). Please see Diagram C.
8. Unthread nut inside canopy (D) from threaded tube attached to hang straight (F). Please see Diagram B.
9. Guide wiring from housing (I) through center hole in canopy (D). Guide canopy (D) down wiring and let rest on housing (I). Center canopy (D) on housing (I). Affix parts together by threading nut (removed from hang straight (F)) onto threaded tube (P).
10. Connect hooks (K) (at the end of arms (J)) to loops (L) attached to the top ring of the fixture. See "Fig. A" on page 1.
11. Lift fixture to "J BOX" and make proper electrical connections. Follow steps 10-12 on page 1 to complete installation.

GLASS DROP INSTALLATION:

*Follow glass drop installation instruction on page 1.

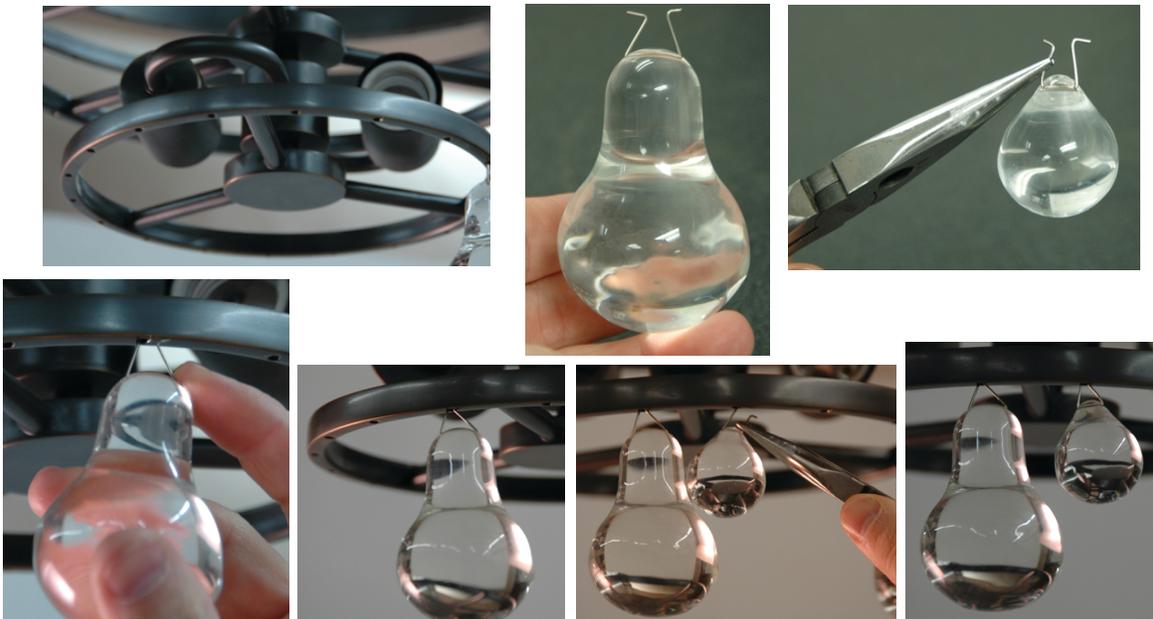

CARE INSTRUCTIONS:

*To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.

*White gloves have been shipped with each fixture . Please wear gloves to keep the fixture clean during installation.