


ASSEMBLY INSTRUCTIONS FOR YOUR

Jonathan Adler

RIO 20 LIGHT CHANDELIER




IMPORTANT SAFETY INSTRUCTIONS:

- * These instructions are provided for your safety. It's important that all safety instructions are read before beginning installation of fixture.
- * **We STRONGLY recommend installation by a licensed electrician.**
- * Do not connect the electricity until lamp is fully assembled.
- * If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.
- * This fixture is UL rated for dry locations.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts carefully from the carton. Do not throw away any parts.
3. Remove mounting plate (B) from canopy (D) by removing canopy screws (E). Set canopy screws (E) aside.
4. Carefully pull the wiring from the ceiling outlet box. Thread the wires through the center hole in mounting plate (B).
5. Affix mounting plate (B) to ceiling outlet box with mounting screws (C), provided.
6. Measure desired drop for fixture to hang and add/remove extension tubes (I) to reach desired position. Guide wiring through extension tubes before threading tubes together. ****TO ADD/ REMOVE EXTENSIONS: (Un)Thread the threaded tube of one extension out of/ into the threaded opening of the next extension. Make sure wiring is pulled tight when threading extensions together to prevent damage to the wire.****
7. Thread bottom extension tube (I) onto threaded tube (J).
8. Secure quick link (G) to hang straight (F) and loop (H).
9. Guide wire exiting the top extension through loop (H), quick link (G), through the center of the hang straight (F), and up through the hole in the canopy (D).

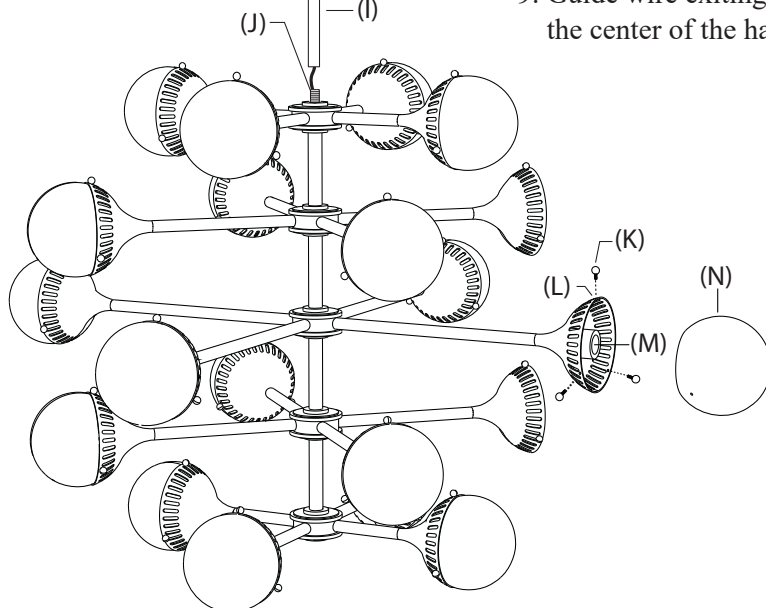

10. Cut the cord to the desired length to make electrical connections. Note: At least 8 inches of wire is needed to make proper electrical connections.
11. Lift canopy (D) to mounting plate (B) and make proper electrical connections described in steps 12-14. A LICENSED ELECTRICIAN IS RECOMMENDED.
12. Attach ground wire from the fixture (green or copper in color) to the ground wire in outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Attach hot wire from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.



ASSEMBLY INSTRUCTIONS FOR YOUR

RIO 20 LIGHT CHANDELIER

14. Gently push wire connections back into ceiling outlet box. Slide canopy (E) over mounting plate (A). Thread screws (D) into holes in canopy (E) to secure fixture to ceiling.
15. Install twenty 40W MAX. Type B medium base bulbs into the sockets (M).
16. Remove screws (K) from shade housings (L). Set screws aside.
17. Install six 40W max. Type B, medium base bulbs into the sockets located inside shade housings (C).
18. Align holes in shade (N) with holes in housing (L). Secure shade by carefully threading screws (K) through holes in housing (L) and into shade (N). Repeat with remaining shades. Note: Make sure screws pass through holes in shade and are not pressing against the glass as this could cause glass to crack.
19. Reconnect main electrical supply at the fuse box/circuit breaker and test fixture.

**** To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners. ****